


## **SUPER PRO FXL-S**

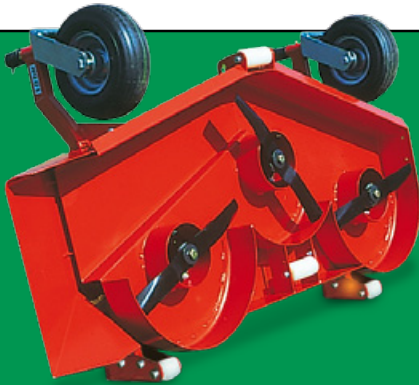

**Rotary mower with side discharge. The mower deck of an extra class. Extremely robust for the rough continuous operation.**

It was specifically designed to meet the hard requirements of the daily professional continuous operation. At the same time it was designed to keep the noise emissions as low as possible. This is ensured by a careful selection and testing of all individual components. The result is an extremely robust mower deck with an excellent cutting performance.

### **TECHNICAL DATA**

### **SUPER PRO FXL-S**

Working width in cm:	150	180
Drive:	PTO	
Weight in kg (approx.):	215	265
Tyres:	13 x 5.00-6	13 x 5.00-6
Cutting height in cm (approx.):	2-11	2-11

Descriptions and illustrations are non-binding. We reserve the right to modify the construction and design.

## **SUPER PRO TXL-S**



**Rotary mower with side discharge. The mower deck of an extra class. Extremely robust for the rough continuous operation.**

Especially fine cut, even in curves, due to the high overcut of the blades. The wedge-shaped ejection channel ensures a reliable ejection of large quantities of grass clippings. Even moist or thick grass will be ejected without choking. This is very important when the clippings are collected by a material collection system at the same time.

### **TECHNICAL DATA**

### **SUPER PRO TXL-S**

Working width in cm:	130	150	180
Drive:	PTO		
Weight in kg (approx.):	180	210	235
Tyres:	Solid tyre	11 x 4.00-5	11 x 4.00-5
Cutting height in cm (approx.):	2 - 11	2 - 11	2 - 11

Descriptions and illustrations are non-binding. We reserve the right to modify the construction and design.